
BuzziBlinds

Product Specification Sheet

This document contains technical
information about the BuzziBlinds



www.buzzi.space



Acoustical performance and privacy with a twist

After the introduction in 2011 BuzziBlinds Classic became an instant hit as partitions for open-plan spaces. Five years later it's time to add some zest to the family. BuzziBlinds are inspired on modernist architecture. The rhythm and tonalities created by the orientation of the V-cut BuzziBlinds add a dynamic of depth to any space.

The free-standing room divider is made up of a series of five rotating acoustic blinds. With a simple twist, the blinds can be opened or closed to varying degrees to create privacy or open-up a space. This gives individuals the opportunity to determine the level of privacy they may want or need at any given moment to concentrate on a specific task.

BuzziBlinds consists of 4 different shapes. The Blinds are covered with plane BuzziFelt. Adding a V-cut feature to the BuzziFelt enhances a stronger architectural look in your space.

Design by Alain Gilles

General

 Straight | Wedge | Beach | Arch
M | L

 Baseplate: powder coated metal
Blinds: core aluminium
BuzziFelt cover

 M: H 155 cm W 149 cm D 49 cm
H 61.02" W 58.66" D 19.29"
L: H 190 cm W 149 cm D 49 cm
H 74.80" W 58.66" D 19.29"

 M: 45 kg
99.21 lbs
L: 49 kg
108.03 Lbs

 Dry use

 Flat packed

Baseplate colour in black (RAL 9005) or white (RAL 9010)

Blinds felt with or without V-cut

Optional felt printed (not possible for V-cut)

 Optional extra layer Fabric, Rough, Trevira CS+ | CS, Revive 1, Revive 2, Terra, Clara 2, Remix 2, Hero, Tonus 4, Memory 2 or Matrix
(extra layer not possible for V-cut)
Multicolour (front & back different colour)
Wheels (4pcs)

Acoustics



Attenuation



Diffusion



Absorption



Mid tones




High tones

Content

Configurations	3	Dimensions	12
Overview	5	Acoustics	14
Fabrics	7		

Configurations

BuzziBlinds Straight

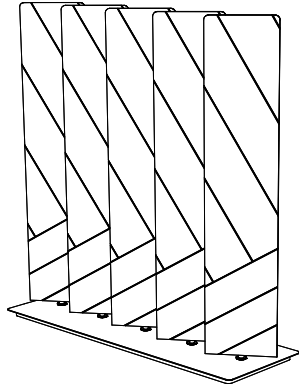

Straight
Front - Back



Straight V-cut
lines 1 Front



Straight V-cut
lines 1 Back



M | L

Baseplate: powder coated metal



Blinds: aluminium core
BuzziFelt cover

M: H 155 cm W 149 cm D 49 cm
H 61.02" W 58.66" D 19.29"



L: H 190 cm W 149 cm D 49 cm
H 74.80" W 58.66" D 19.29"

Baseplate color in black (RAL 9005) or
white (RAL 9010)

Blinds felt with or without V-cut

Optional Felt printed (not possible for V-cut)

Optional extra layer Fabric, Rough,





Trevira CS+ | CS, Revive 1, Revive 2, Terra,
Clara 2, Remix 2, Hero, Tonus 4, Memory 2 or
Matrix

(extra layer not possible for V-cut)

Multicolor (front & back different color)

Wheels (4pcs)

BuzziBlinds Wedge

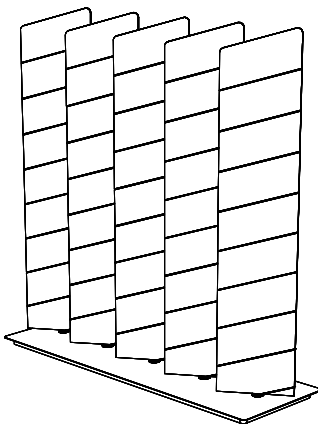

Wedge
Front - Back



Wedge V-cut
lines 1 Front



Wedge V-cut
lines 1 Back



M | L

Baseplate: powder coated metal



Blinds: aluminium core
BuzziFelt cover

M: H 155 cm W 149 cm D 49 cm
H 61.02" W 58.66" D 19.29"



L: H 190 cm W 149 cm D 49 cm
H 74.80" W 58.66" D 19.29"

Baseplate color in black (RAL 9005) or
white (RAL 9010)

Blinds felt with or without V-cut

Optional Felt printed (not possible for V-cut)

Optional extra layer Fabric, Rough,





Trevira CS+ | CS, Revive 1, Revive 2, Terra,
Clara 2, Remix 2, Hero, Tonus 4, Memory 2 or
Matrix

(extra layer not possible for V-cut)

Multicolor (front & back different color)

Wheels (4pcs)

BuzziBlinds Beach

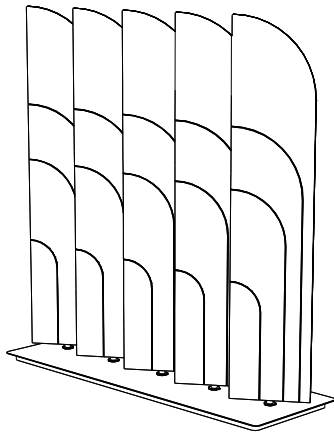

Beach
Front - Back



Beach V-cut
lines 1 Front



Beach V-cut
lines 1 Back

🏷 M | L

Baseplate: powder coated metal



Blinds: aluminium core
BuzziFelt cover

M: H 155 cm W 149 cm D 49 cm
H 61.02" W 58.66" D 19.29"



L: H 190 cm W 149 cm D 49 cm
H 74.80" W 58.66" D 19.29"

Baseplate color in black (RAL 9005) or
white (RAL 9010)

Blinds felt with or without V-cut

Optional Felt printed (not possible for V-cut)

Optional extra layer Fabric, Rough,


... Trevira CS+ | CS, Revive 1, Revive 2, Terra,
Clara 2, Remix 2, Hero, Tonus 4, Memory 2 or
Matrix

(extra layer not possible for V-cut)


Multicolor (front & back different color)

Wheels (4pcs)

BuzziBlinds Arch

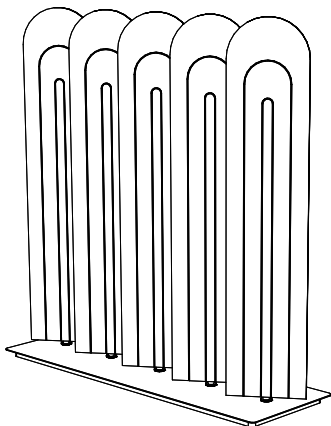

Arch
Front - Back



Arch V-cut lines 1
Front - Back

🏷 M | L

Baseplate: powder coated metal



Blinds: aluminium core
BuzziFelt cover

M: H 155 cm W 149 cm D 49 cm
H 61.02" W 58.66" D 19.29"



L: H 190 cm W 149 cm D 49 cm
H 74.80" W 58.66" D 19.29"

Baseplate color in black (RAL 9005) or
white (RAL 9010)

Blinds felt with or without V-cut

Optional Felt printed (not possible for V-cut)

Optional extra layer Fabric, Rough,

... Trevira CS+ | CS, Revive 1, Revive 2, Terra,
Clara 2, Remix 2, Hero, Tonus 4, Memory 2 or
Matrix


(extra layer not possible for V-cut)

Multicolor (front & back different color)


Wheels (4pcs)

Overview

BuzziBlinds Straight M|L



Straight
Front




Straight
Back


M: H 150 cm W 32 cm
H 59.06" W 12.60"

L: H 185 cm W 32 cm
H 72.83" W 12.60"

BuzziBlinds Straight V-cut M|L



Straight V-cut lines 1
Front




Straight V-cut lines 1
Back

M: H 150 cm W 32 cm
H 59.06" W 12.60"

L: H 185 cm W 32 cm
H 72.83" W 12.60"

BuzziBlinds Wedge M|L



Wedge
Front



Wedge
Back


M: H 150 cm W 32 cm
H 59.06" W 12.60"

L: H 185 cm W 32 cm
H 72.83" W 12.60"

BuzziBlinds Wedge V-cut M|L



Wedge V-cut lines 1
Front




Wedge V-cut lines 1
Back

M: H 150 cm W 32 cm
H 59.06" W 12.60"

L: H 185 cm W 32 cm
H 72.83" W 12.60"

BuzziBlinds Beach M/L

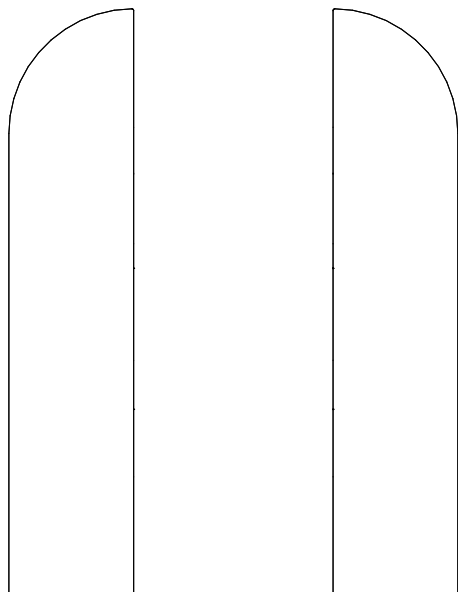


Beach
Front

Beach
Back

M: H 150 cm W 32 cm
H 59.06" W 12.60"

L: H 185 cm W 32 cm
H 72.83" W 12.60"

BuzziBlinds Beach V-cut M/L

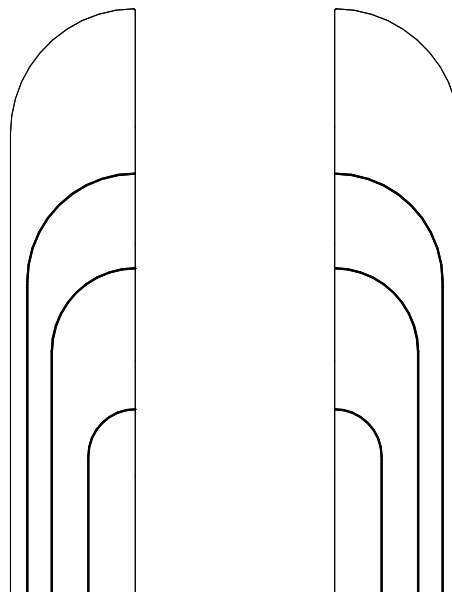


Beach V-cut lines 1
Front

Beach V-cut lines 1
Back

M: H 150 cm W 32 cm
H 59.06" W 12.60"

L: H 185 cm W 32 cm
H 72.83" W 12.59"

BuzziBlinds Arch M/L

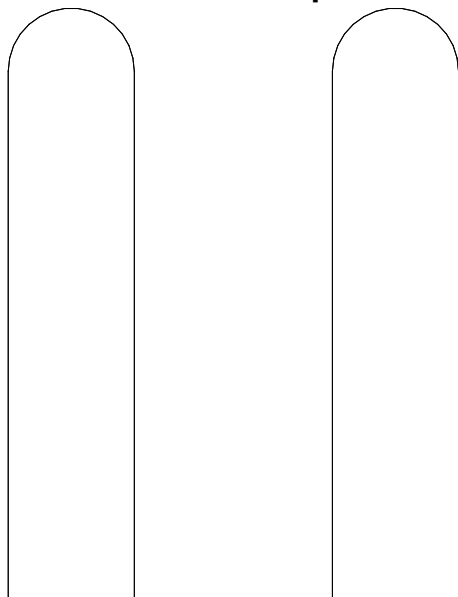


Arch
Front

Arch
Back

M: H 150 cm W 32 cm
H 59.06" W 12.60"

L: H 185 cm W 32 cm
H 72.83" W 12.60"

BuzziBlinds Arch V-cut M/L

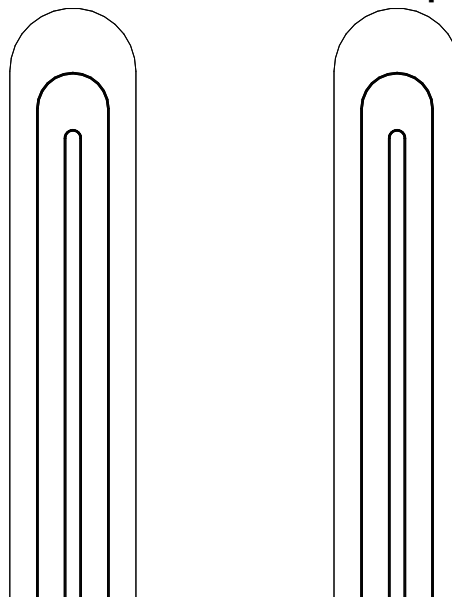

Arch V-cut lines 1
Front


Arch V-cut lines 1
Back

M: H 150 cm W 32 cm
H 59.06" W 12.60"

L: H 185 cm W 32 cm
H 72.83" W 12.60"

Fabrics


Felt



Composition 100% Recycled PE.T. Felt, latex backing
Weight 1.000 g/m² | 29.49 oz/yd²
Abrasion resistance >7.000 Martindale
Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0
USA: ASTM E84 Class A certified
Fastness to light USA 5



Fabric



Category A
Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics
Weight 405 g/m² | 11.94 oz/yd²
Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A
Fastness to light EU: 4 | USA 4
Fastness to rubbing EU: Wet 3-4 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5




Rough



Category A
Composition 100% Polyacryl
Weight 456 g/m² | 13.45 oz/yd²
Abrasion resistance 40.000 Martindale
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
USA: CAL TB TB 117
Fastness to light EU: 5
Fastness to rubbing EU: Wet: 3 | Dry: 3



Trevira CS+ | CS




Category A
Weight 420 g/m² | 12.39 oz/yd²
Composition 100% Polyester, Trevira CS
Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek
Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)
Fastness to light EU: 6 | USA 5
Fastness to rubbing EU: Wet 4-5 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5



Revive 1

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Revive 2

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 420 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)


Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Velvet



Category B

Composition 100% PES

Weight 375 g/m² | 11.06 oz/yd²


Abrasion resistance > 100.000 Martindale

Fastness to light EU: 4-5

Fastness to rubbing EU: Wet 4 | Dry 4-5

Pilling EU: 4-5

Terra



Category B

Composition 100% Pure New Wool

Weight 370 g/m² | 10.91 oz/yd²

Abrasion resistance 40.000 Martindale, 25,000 Wyzenbeek

Flammability EU: BS5852 CRIB 5 | BS5867 PART 2 : 2008 : TYPE B
EN: 1021.2/2006 | USA: CAL TB 117

Fastness to light EU 5 | USA 5


Fastness to rubbing EU: Wet 4 | Dry 4

Fastness to crocking USA: Wet 4 | Dry 4



Clara 2

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 2

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013
NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero

kvadrat



Category C

Composition 96% new wool, 4% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2
Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM
US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Memory 2

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945



Matrix

kvadrat



Category F

Composition 100% Trevira CS

Weight 760 g/lin.m

Abrasion resistance

App. 60.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 crib 5 | BS 5867 part 2 type B
DIN 4102 B1 | Önorm B1/Q1 | NF D 60 013
UNI 9175 1IM | US Cal. Tech. Bull. 117 | NFPA 701
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945



Felt Printed (not for possible for V-cut)

Composition 100% Recycled P.E.T. Felt, latex backing

Weight 1.000 g/m2 | 29.49 oz/yd2

Abrasion resistance >7.000 Martindale


Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0

USA: ASTM E84 Class A certified

Fastness to light USA 5



Concrete




Green 1




Green 2



Jungle



Marble Absynth



Marble Emperador



Camo Amazon



Camo Taiga




Camo Desert




Camo Snow

Dimensions

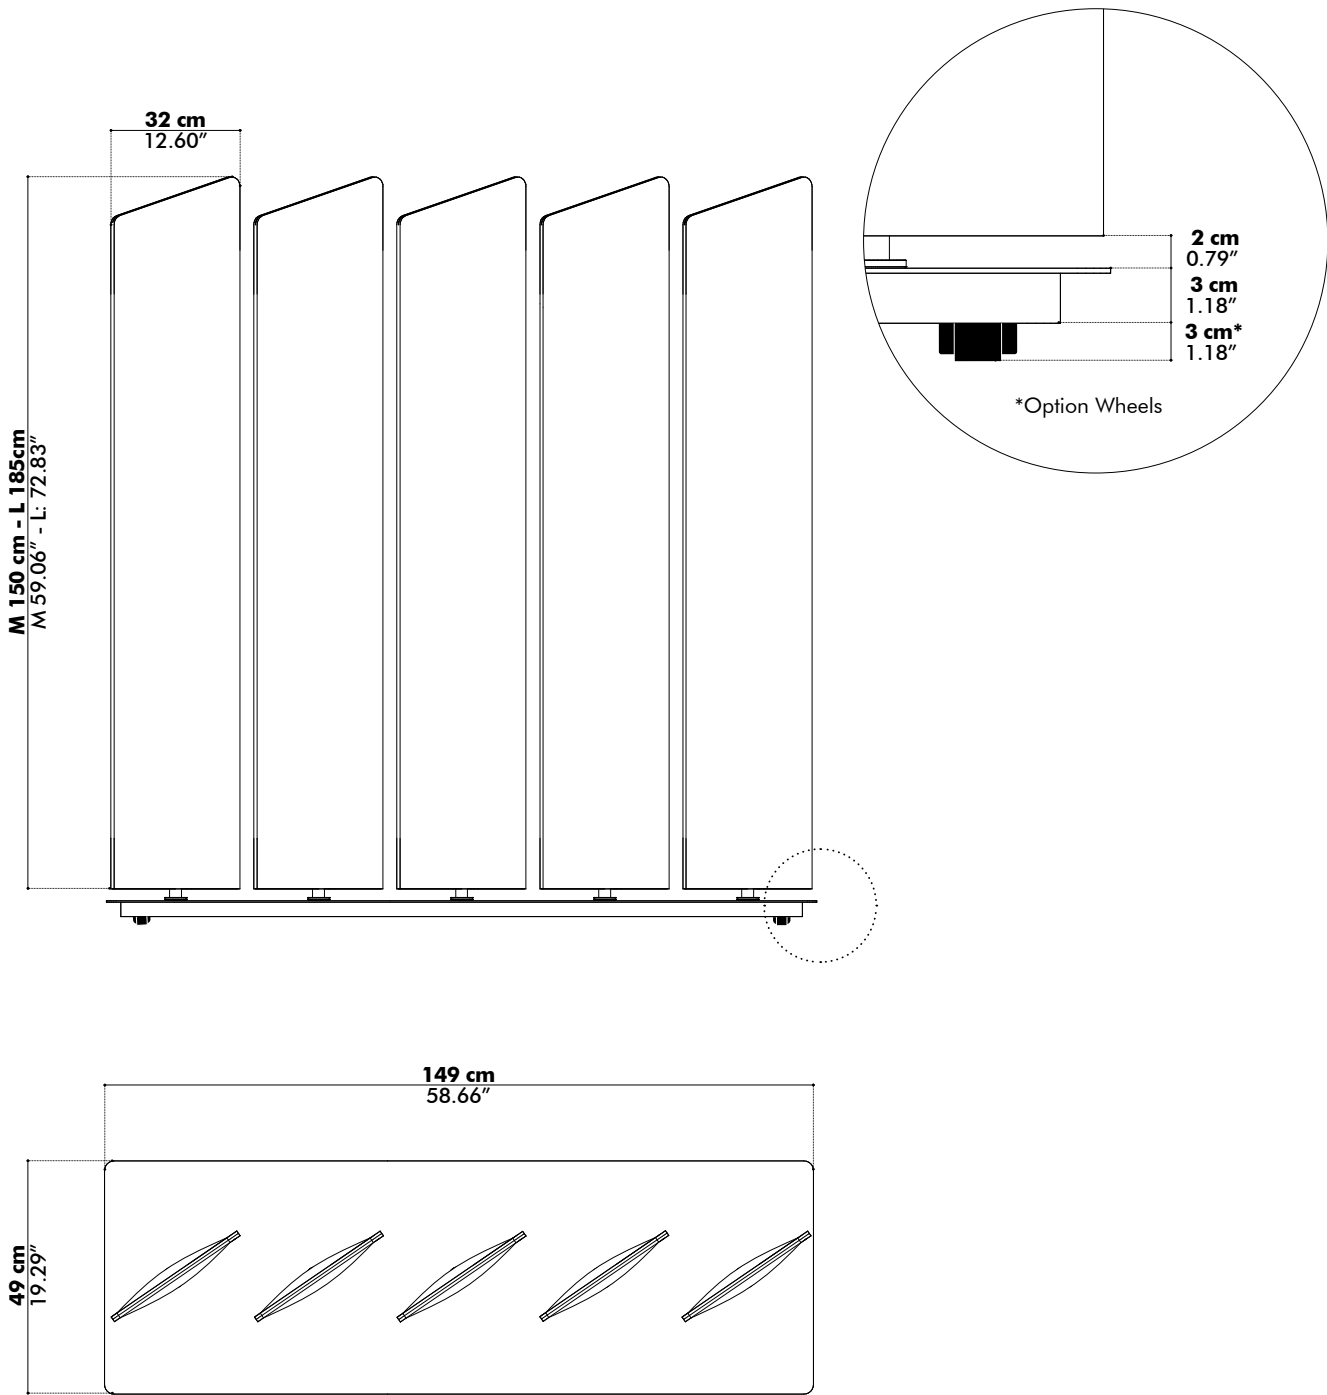


BuzziBlinds Baseplate Regular

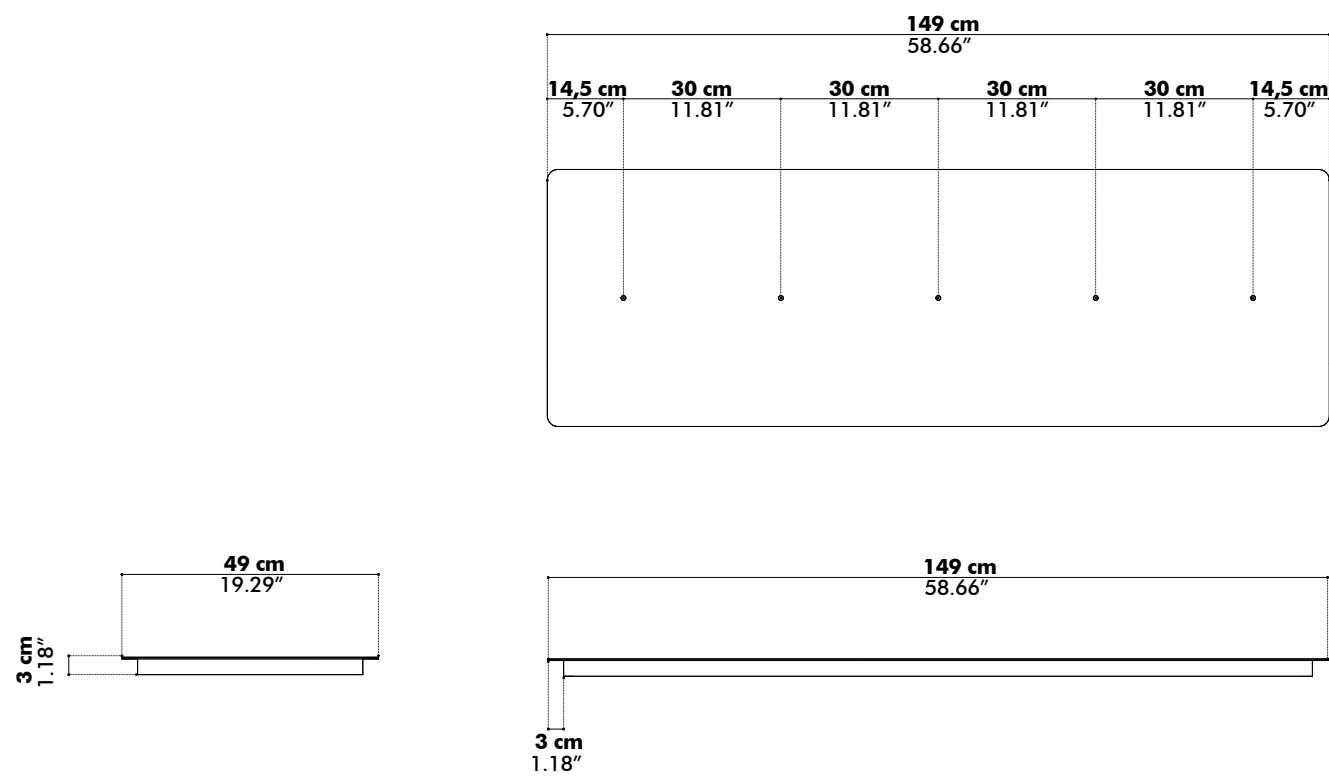

Acoustics

Equivalent sound absorption area in m² per object

BuzziBlind Wedge closed position

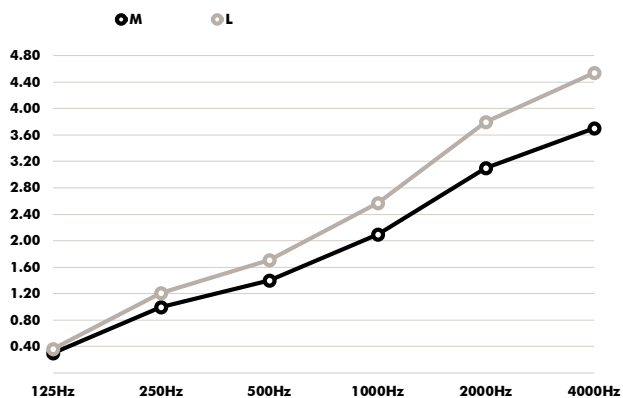

Hz	M Aeq/m²	L Aeq/m²
125	0.30	0.36
250	1.00	1.21
500	1.40	1.71
1000	2.10	2.57
2000	3.10	3.80
4000	3.70	4.54